


BİLGİLER

65" No-OS Professional Touch Display for Maximum Security and Full IT Control

The ProLite TN6505A-B1AG is a large-format professional touch display, without an operating system, designed for environments where security, reliability and control are non-negotiable. Despite its minimalist structure, the TN6505A is exceptionally easy to use: simply connect your source and it works. The responsive multi-touch panel, 4K UHD resolution and high brightness deliver a precise and professional experience for collaboration, presentations and interactive applications. Built-in annotation allows users to write directly on the screen with a pen, marking up presentations or any on-screen content in real time for clear and effective communication. The TN6505A is the ideal choice for banks, courts, defence organisations, IT departments, universities and other high-security or compliance-driven environments where simplicity, transparency and trust are essential.

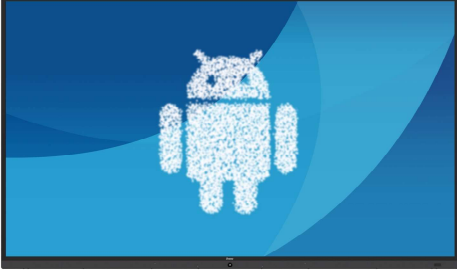

OS-Free

- No operating system, where security, reliability and control matter



Maximum security

With no operating system to manage or update, the display offers a stable, secure solution ideal for environments where data protection and reliability are critical.



Plug & Play simplicity

Designed for ultimate ease of use: plug in your laptop and share your content instantly. No operating system, no complicated configuration.



Her Ortama Değer Katan Estetik

Modern, minimalist ve her ortama değer katmak için tasarlanmış – bu tasarım hem sınıflara hem de toplantı odalarına kusursuz şekilde uyum sağlar. Bu sadece bir ekran değil; aynı zamanda bir ifadedir. Temiz çizgiler, kaliteli bir son dokunuş ve dikkat çekmeden odaklanmayı ve profesyonelliği artıran bir duruş.

ÖZELLİKLER

01 EKРАН ÖZELLİKLERİ

Ekran Boyutu	64.5", 163.9cm
Diyagonal	163.9cm
Panel	IPS, AG coating & Anti-Bacteria coating, haze 25%
Çözünürlük	3840 x 2160 (8.3 megapixel 4K UHD)
En-Boy Oranı	16:9
Panel Parlaklığı	500 cd/m ²
Parlaklık	450 cd/m ² (max.)
Statik Kontrast	1200:1
Tepki süresi (GTG)	5ms
Görüntüleme Alanı	yatay/dikey: 178°/178°, sağ/sol: 89°/89°, yukarı/aşağı: 89°/89°
Yatay Sync	30 - 135kHz
Görüntülenebilir alan G x Y	1428.5 x 803.5mm, 56.2 x 31.6"

02 DOKUNMATİK

Dokunmatik teknoloji	DeepContrast-IR+
Dokunmatik Nokta Sayısı	40pt (HID, only with supported OS)
Dokunma doğruluğu	+/- 1mm
Desteklenen işletim sistemleri	All iyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
Palm rejection	Evet

03 ARAYÜZLER / BAĞLANTILAR / KONTROLLER

Analog sinyal girişi	VGA x1 (FHD)
Dijital sinyal girişi	HDMI x2 (CEC/ARC) DisplayPort x1 USB-C x1 (Power Delivery 65W, DP-Alt, Data, Touch)
Ses girişi	Mini jack x3.5 mm
Monitör kontrol girişi	RS-232c x1 RJ45 (LAN) x2 ((in/out))
Ses çıkışı	Mini jack x1 Hoparlör 2 x 20W (Subwoofer 1x 20W)
Monitor control output	RS-232c x1 IR döngüsü x1 OPS Slot x1 (Intel OPS80 standard)
USB Portları	x1 2.0 (2x 3.2 (USB-B up for touch HDMI1/DP/VGA))
RS-232c	x1
RJ45 (LAN)	x2

04 ÖZELLİKLER

Dahili OS No OS Operating System

PIP evet

PbP evet

05 GENEL

Kullanıcı kontrolleri Color temp., image mode (including eye protection mode), sound mode, no signal standby (Off / 1 min. / 3 min. / 5 min. / 15 min. / 30 min.), meeting mode, time scheduler, key lock, PIP & PBP, brightness / contrast.

06 MEKANİK

Fansız tasarım evet

Çalışma sıcaklığı aralığı 0°C - 40°C

Depolama sıcaklığı aralığı - 20°C - 60°C

07 PAKET İÇERİĞİNDEKİ AKSESUARLAR

Kablolar güç, HDMI, RS-232c

Diğer 4x Stylus, Webcam bracket, Wall mount, HDMI 3m, USB 3m, Power

08 GÜÇ YÖNETİMİ

Güç Tüketimi 146W tipik, 0.5W stand by, 0.3W off mode

09 ÖLÇÜLER / AĞIRLIK


Ürün boyutları G x Y x D 1489.1 x 911.8 x 118.6mm

Ağırlık (kutu hariç) 41.1kg

EAN kodu 4948570127061

10 AB ENERJİ VERİMLİLİĞİ ETİKETİ

Kapalı Modunda Güç 0.3W kapalı mod

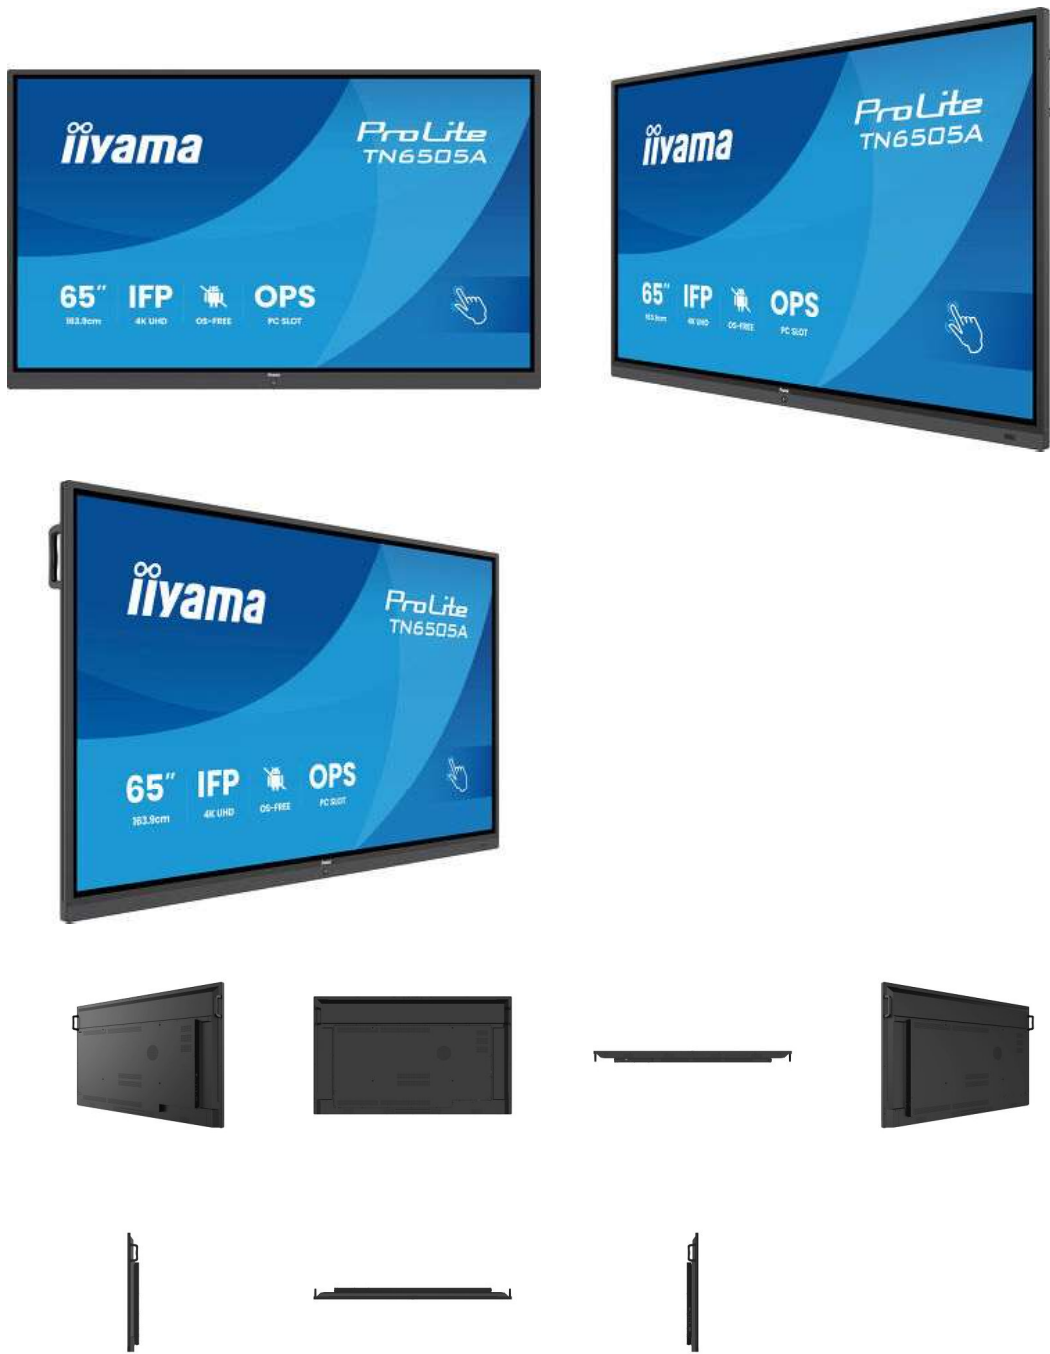

All trademarks and registered trademarks acknowledged, E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IIYAMA CORPORATION. ALL RIGHTS RESERVED